

TYPICAL APPLICATION CIRCUIT



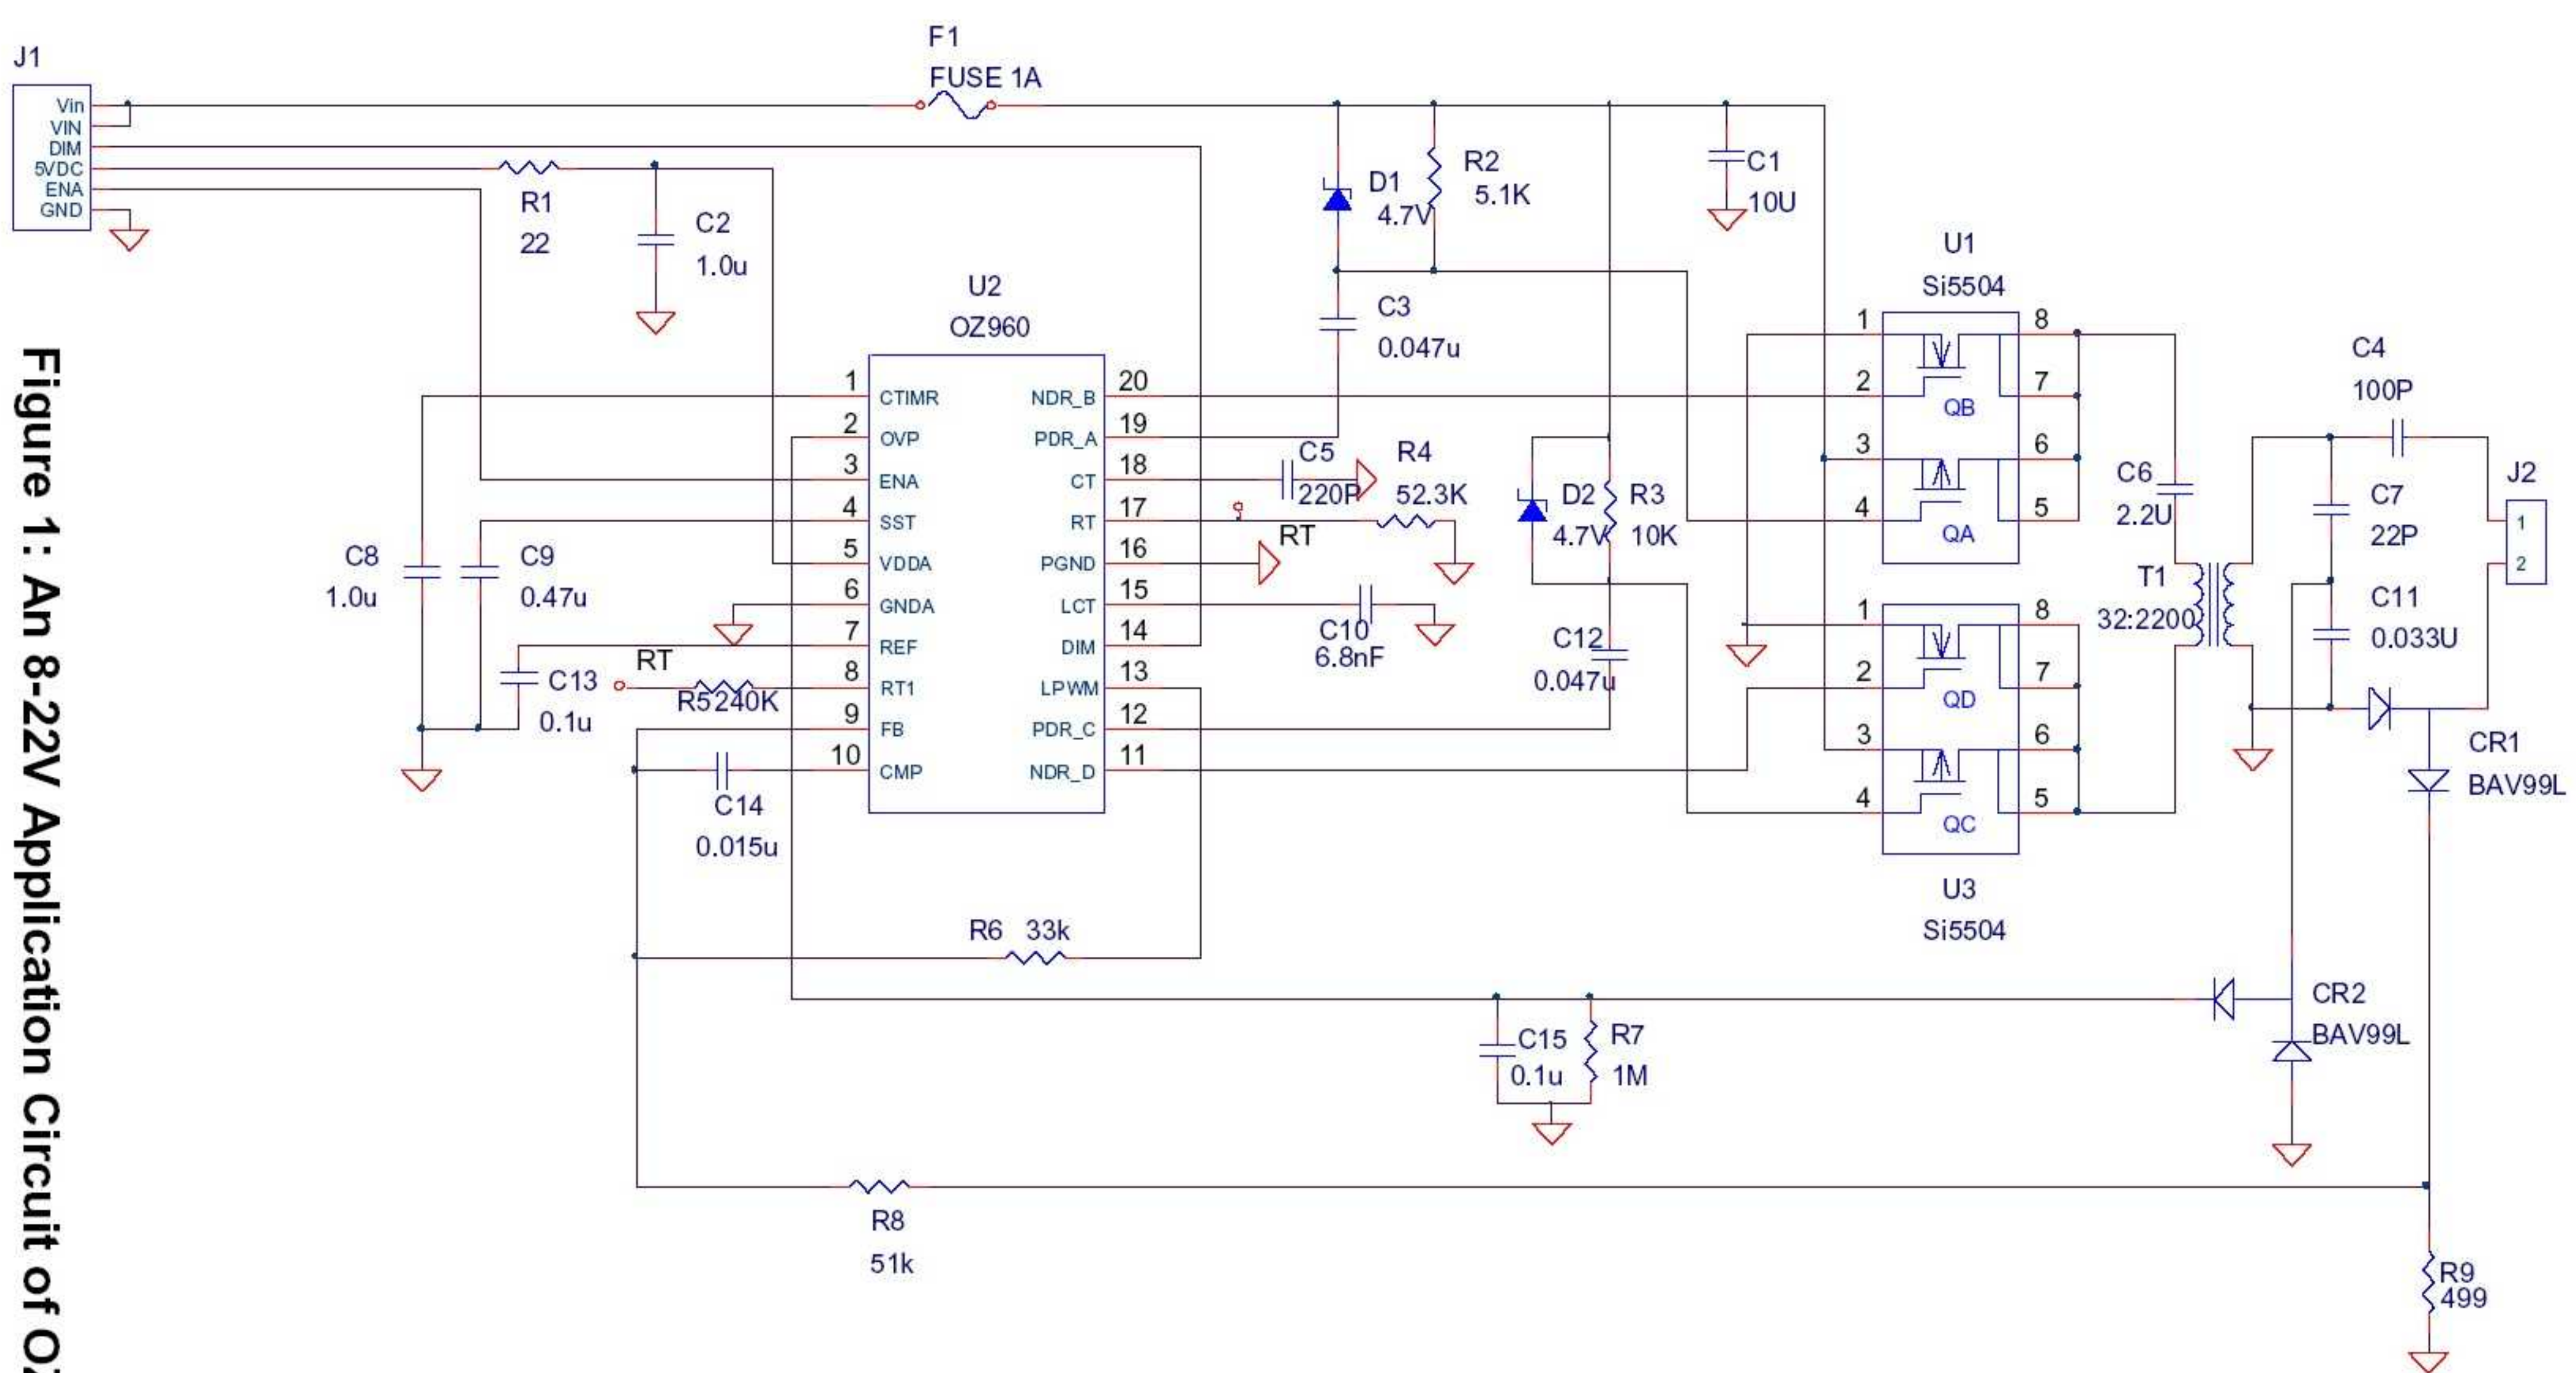


Figure 1: An 8-22V Application Circuit of OZ960


VIN: 8.0V---22V
ENA: 0V--1.0V Disable;2.0V---3.3V Enable
DIM: 3V Max. Brightness; 1.2V Min. Brightness
Striking frequency: 74KHz - 82KHz
Operating frequency: 56KHz - 64KHz

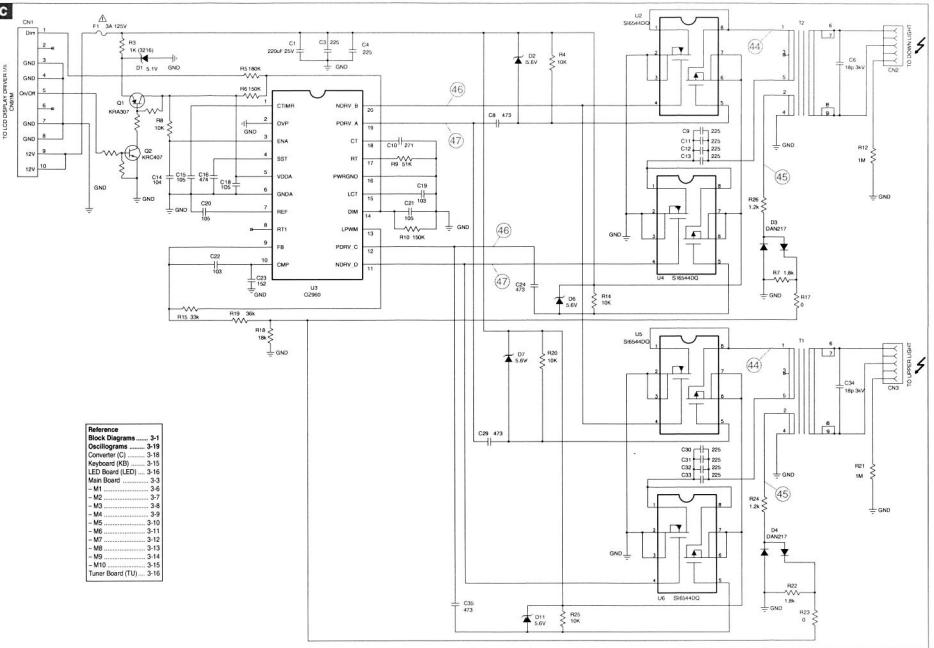


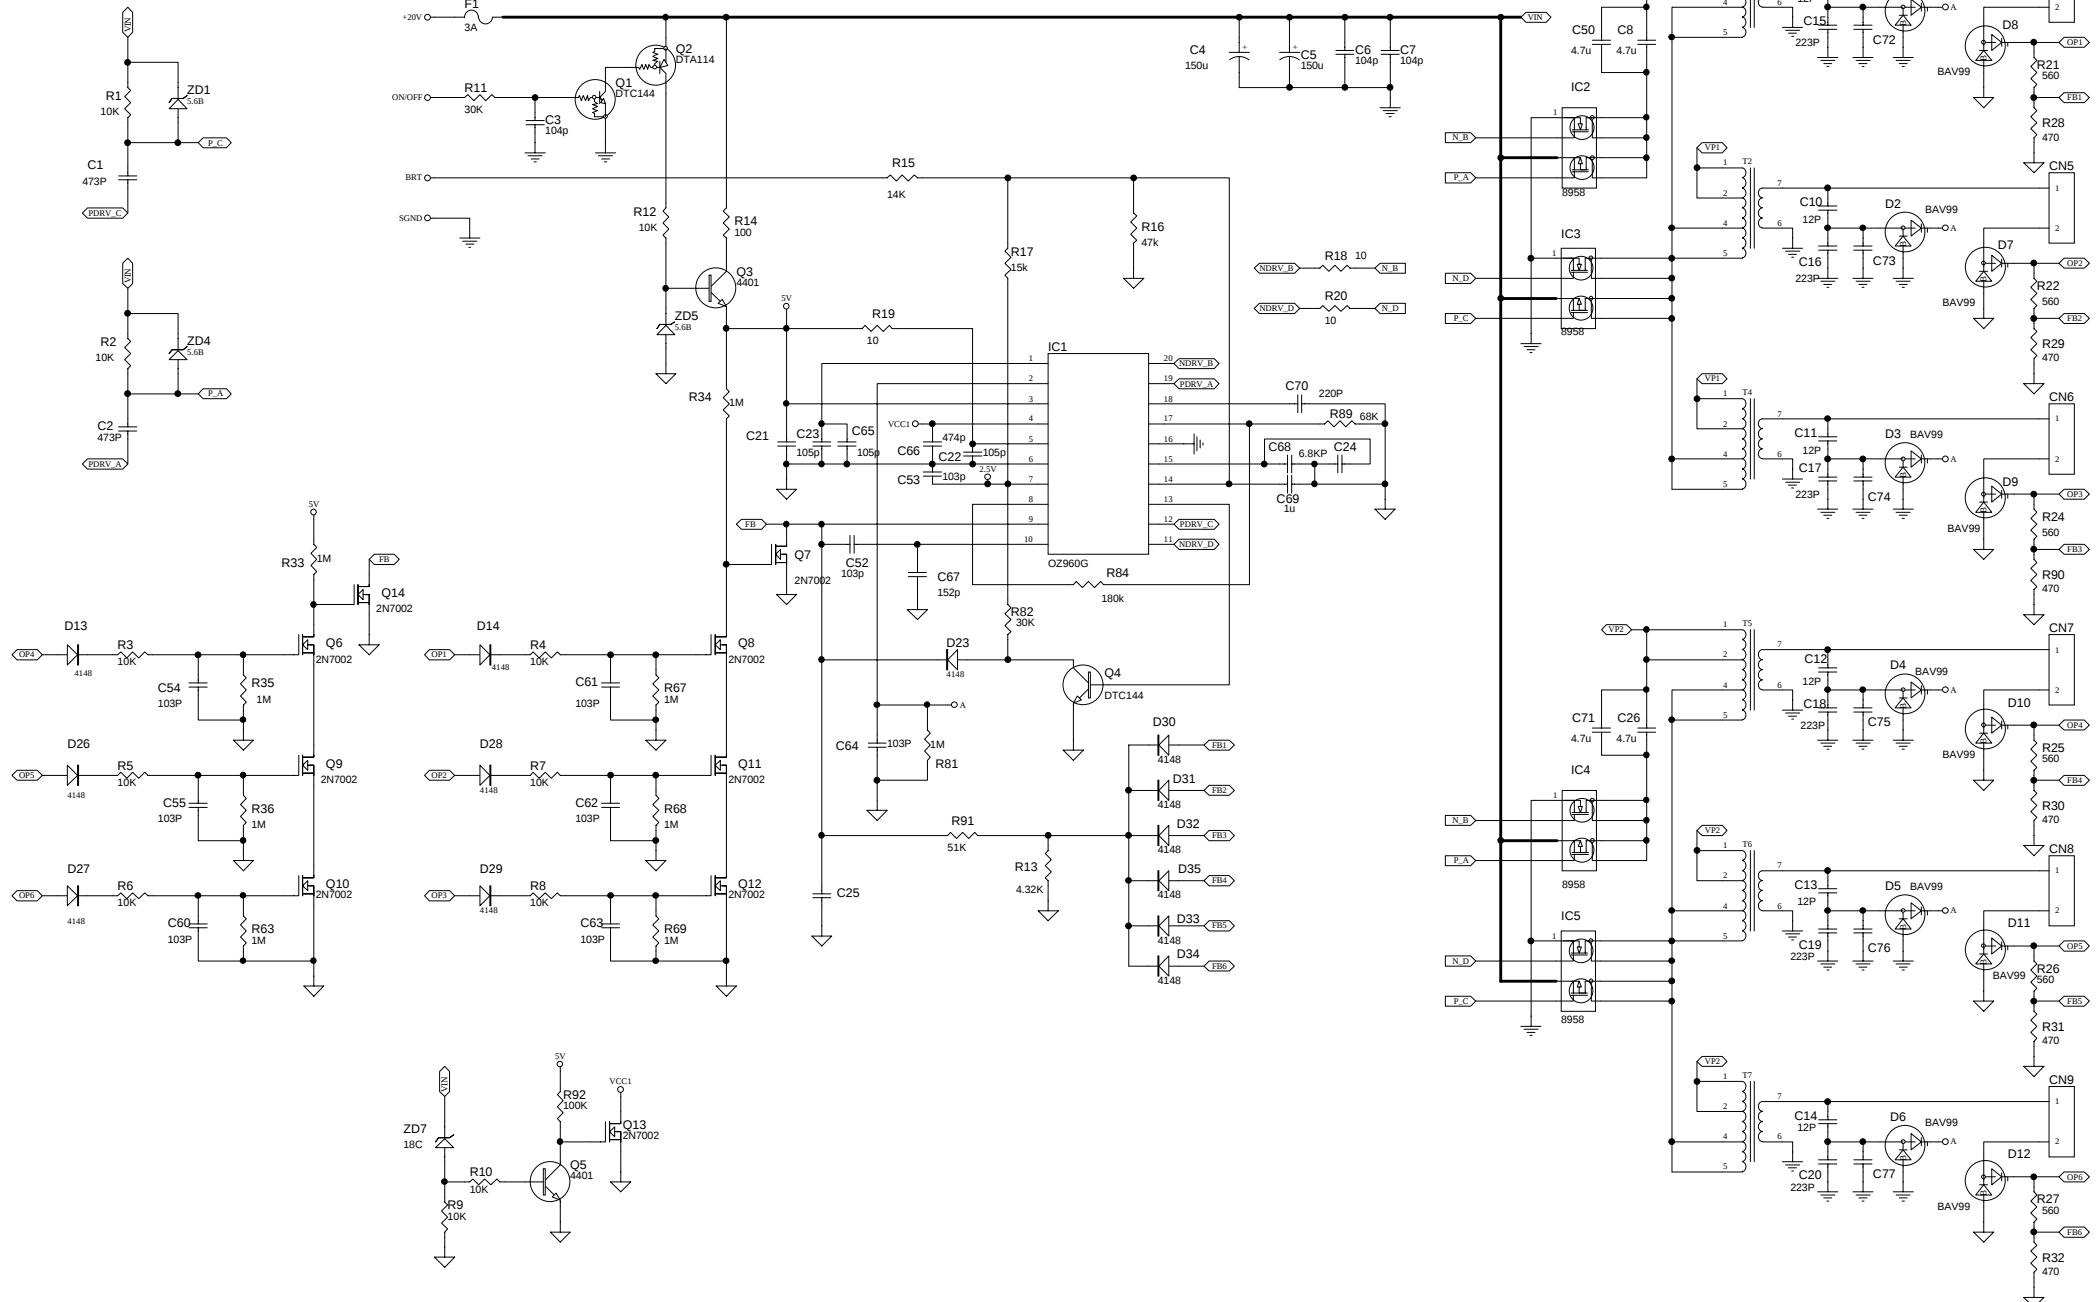

 DELTA ELECTRONICS, INC. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.	Date: 01/26/05	LY.REV: 0	Drawn: JIE	Checked	Approved	PART NO:	REV.	SHEET
	PCB: DAC-12M025 AF ROC0X05	FILE NAME: DAC-12M025 AF ROC0X05		陈红卫	Van Dang	SK-DAC-12M025	00	2 OF 2
	DESCRIPTION: SCHEMATIC OF INVERTER			01/26/05	01/26/05			

Belinea 101705(111718) Inverter

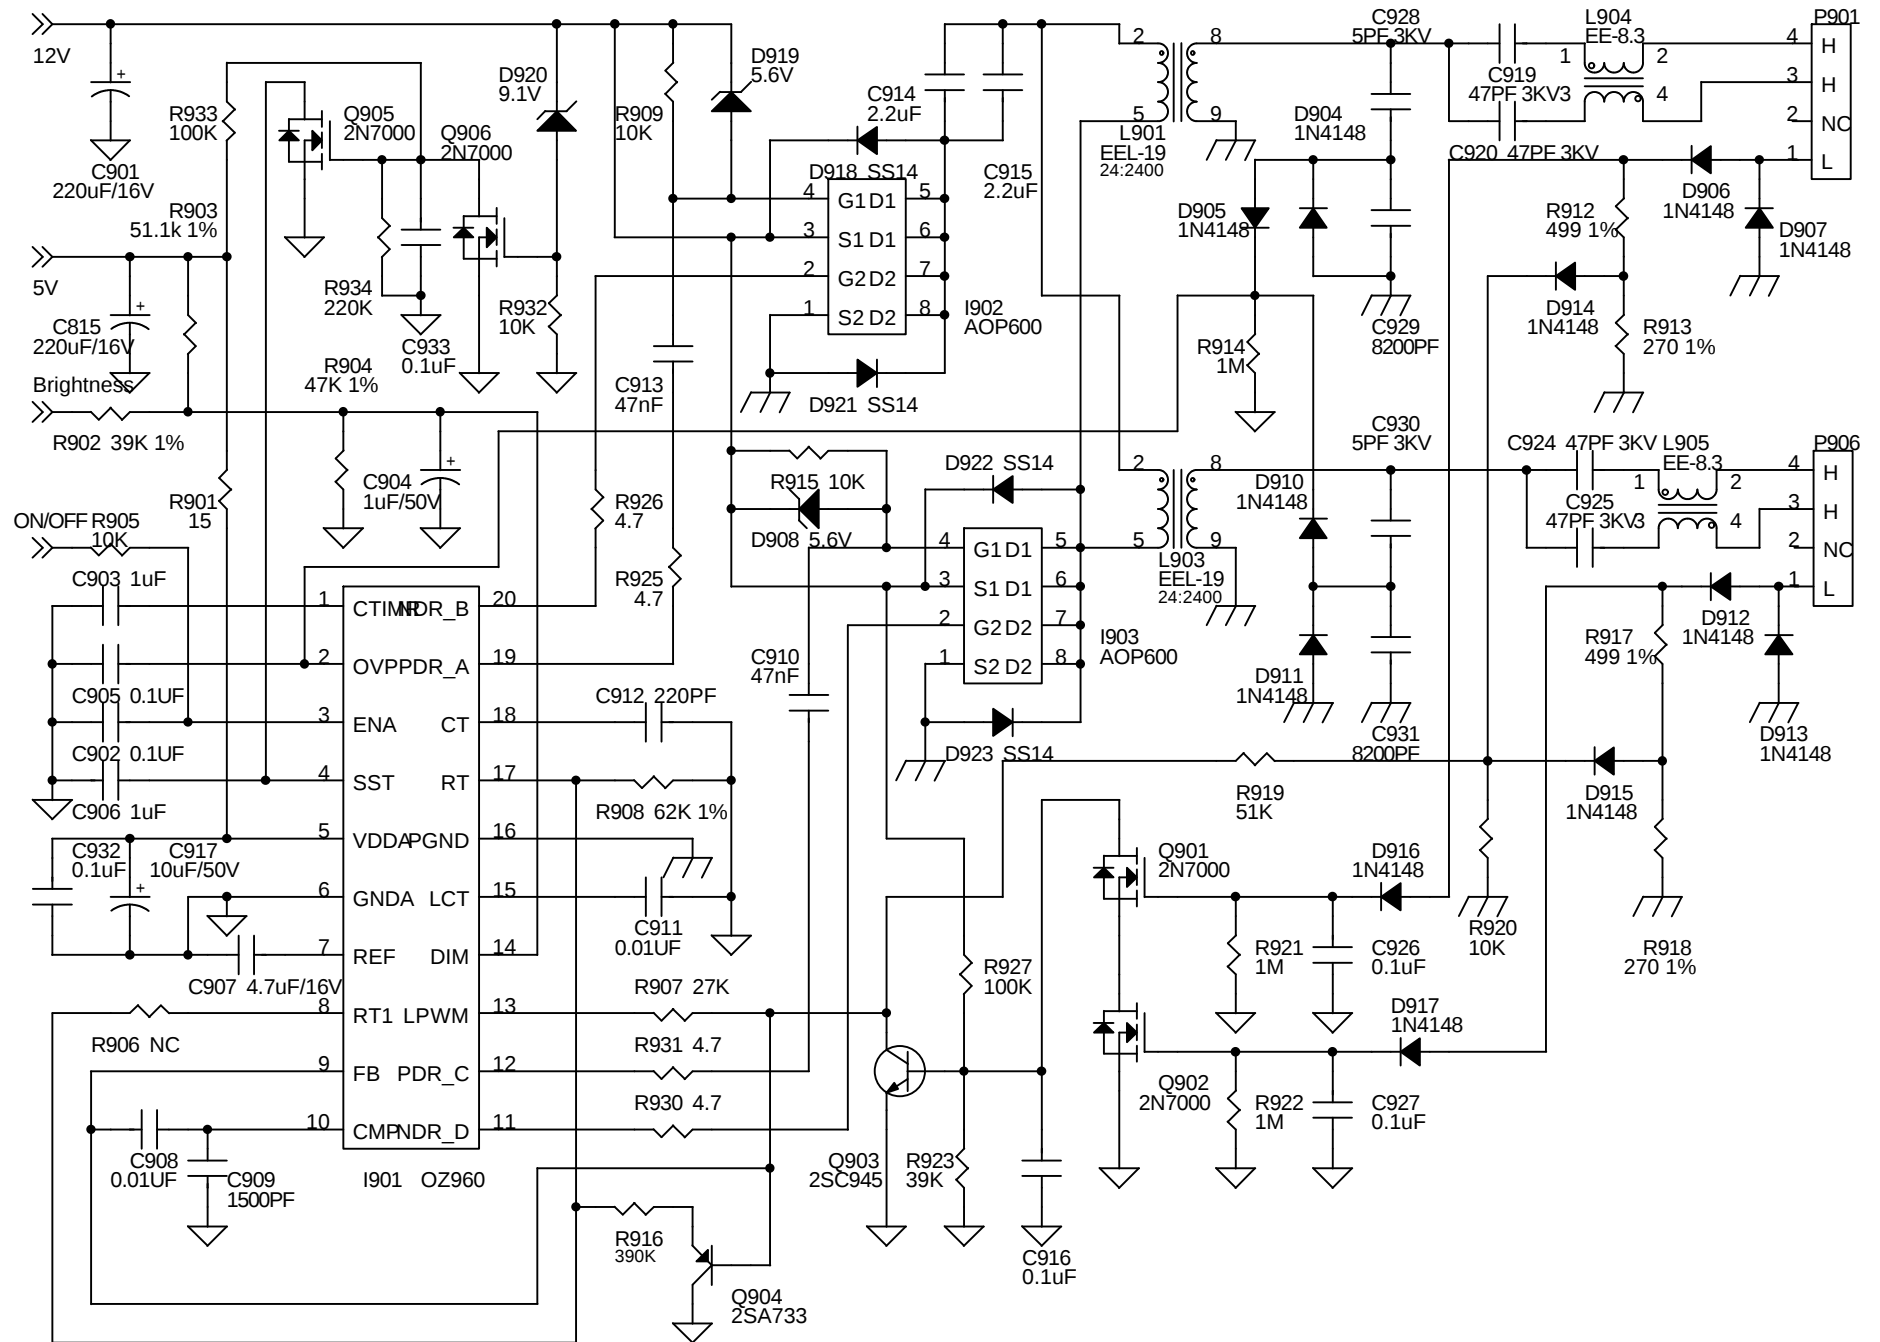

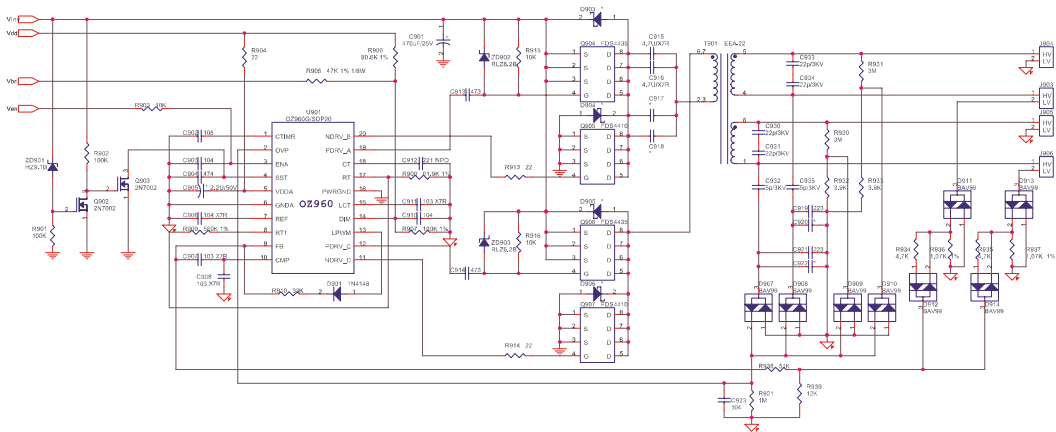

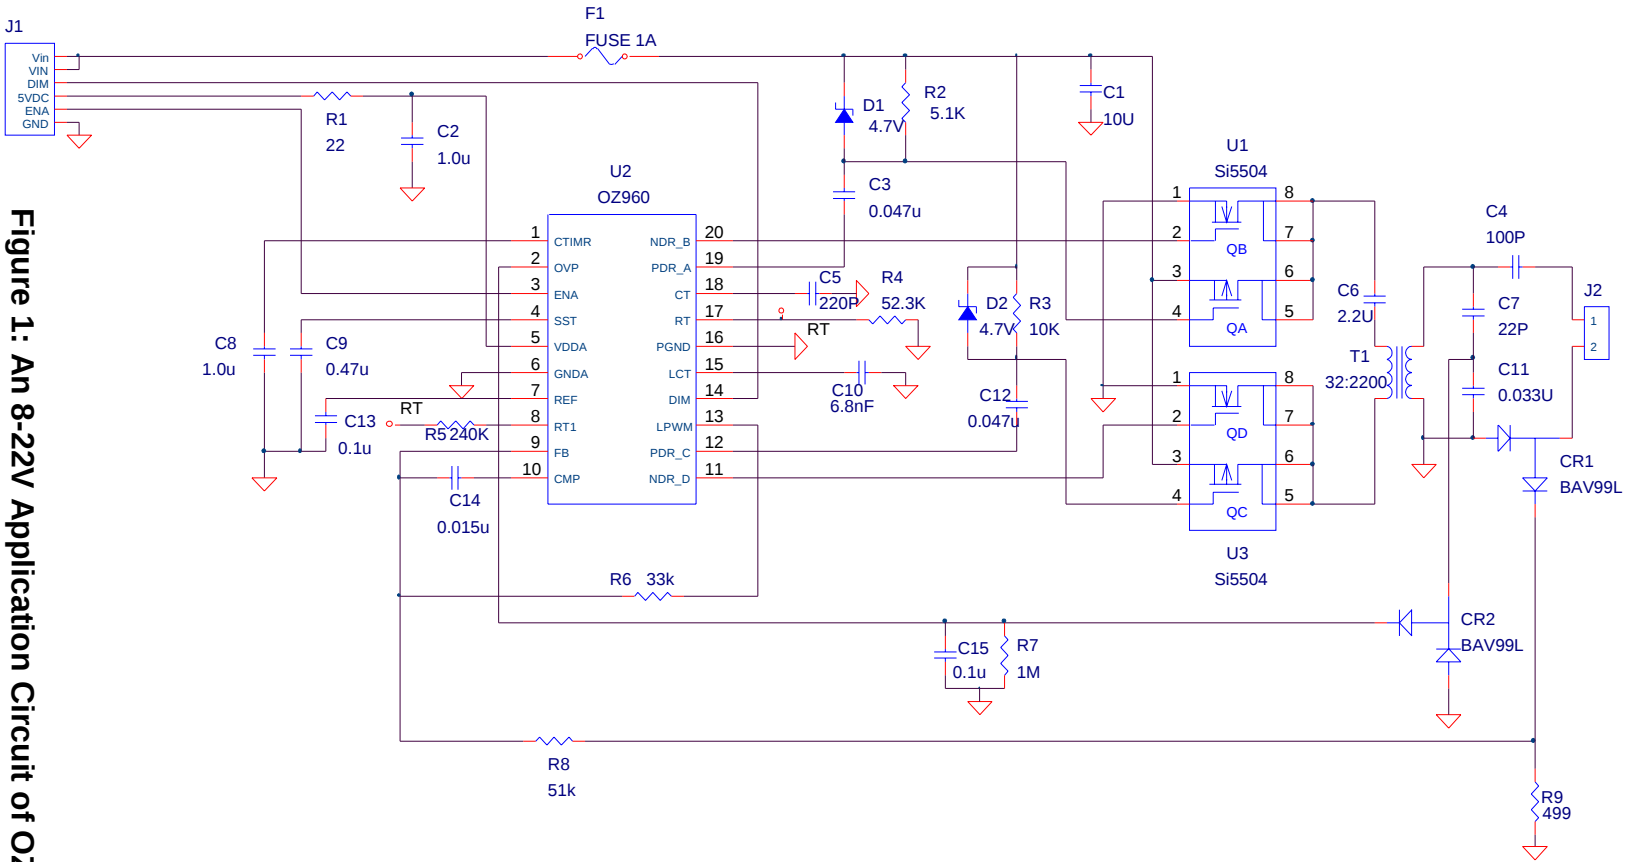


Figure 1: An 8-22V Application Circuit of OZ960

